

Twist Type Shifter

The shifters are compatible with Shimano derailleur system.

Mounting the shifter


1. Slide the front (rear) shifter onto the left (right) side of the handlebar.
2. Tighten the clamp bolt by 2.5 mm Allen Key .
3. Slide the handlebar grip onto the handlebar.

Replacing cable & Adjustment


1. Remove cable cap from shifter body .
2. Rotate the shifter upto one end until cable head appear in hole.
3. Push the cable head out from cable hook and pull out cables.
4. Route new cable through hole.

When necessary , shifting adjustment can be corrected by turning the adjusting barrel.

Mounting the shifter

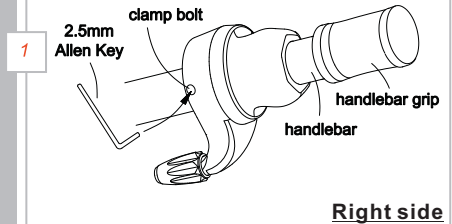

Replacing cable & Adjustment

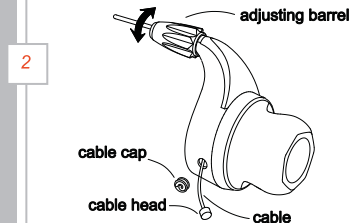

microSHIFT